



Zertifiziertes  
QM-System  
DIN EN ISO 9001  
Zertifikat-Nr. 01017

## Turbine Wheel Flowmeter / Monitor

for liquids



measuring  
•  
monitoring  
•  
analysing

### DRS



Model:  
DRS-...C3

- Measuring range: 2 - 40 l/min water
- Measuring accuracy:  $\pm 1.5\%$  of full scale
- $p_{\max}$ : 200 bar;  $t_{\max}$ : 80 °C (optional 150 °C)
- Viscosity range: low viscous
- Connection:  
G 1/2 female/male thread,  
G 3/4 male/male thread  
3/4" NPT male/male thread
- Material:  
PPO/PEI/brass/stainless steel
- Output:  
pulses, 0 - 20, 4 - 20 mA,  
Switching output NPN



Model:  
DRS-...0  
DRS-...F5...



S4

KOBOLD companies worldwide:

AUSTRALIA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHINA, CZECHIA, EGYPT, FRANCE,  
GERMANY, GREAT BRITAIN, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO,  
NETHERLANDS, PERU, POLAND, REPUBLIC OF KOREA, ROMANIA, RUSSIA, SPAIN,  
SWITZERLAND, THAILAND, TUNISIA, TURKEY, USA, VIETNAM

KOBOLD Messring GmbH  
Nordring 22-24  
D-65719 Hofheim/Ts.  
Head Office:  
+49(0)6192 299-0  
+49(0)6192 23398  
info.de@kobold.com  
www.kobold.com

**Application**

KOBOLD model DRS flowmeters are used for measuring and monitoring liquids. Due to its compact construction the mini turbine is suitable for use with machines with minimum available space.

**Application Examples**

Beverage industry, devices for use in automatic beverage retail systems, washing machines, vehicles, farm equipment, developing machines in the photographic and printed-circuit board industries.

**Working Principle**

The flowmeter operates on the turbine wheel principle. The liquid first flows through a laminar flow element to eliminate turbulence and to route the flow stream to the turbine wheel. The turbine wheel then starts to rotate. This rotary motion is sensed non-contacting by magnets embedded in the turbine wheel and converted to a frequency signal. The frequency is proportional to the flow velocity.

Frequency divider, analogue output or compact electronics with LED display and limit contacts are available as options. An integrated temperature sensor for simultaneous measuring of flow rate and temperature are available as an additional option. The vane is sapphire-supported: this ensures a high degree of linearity and long service life.





## Model Summary

- **DRS-0...K000, DRS-0...S000**  
OEM version (without CE mark)  
direct output from Hall-sensor signal  
for DRS-K000 no optional temperature sensor available  
DRS-0...S000 up to 150 °C medium temperature
- **DRS-...F300**  
Pulse output
- **DRS-...F390**  
Pulse output with adapted frequency  
Factor 0.25...2
- **DRS-...L...**  
Analogue output 0(4)-20 mA / 3-wire
- **DRS-...C30...**  
With compact electronics, 3-digit LED display,  
limit contacts, no optional temperature sensor available
- **DRS-...C34...**  
With compact electronics  
3-digit LED display, limit contact, analogue output  
no optional temperature sensor available

## Technical Details

Measuring range:	2 - 40 l/min water
Sensor pulse output:	384 Hz at 40 l/min metal sensor (DRS-150; DRS-250) 352 Hz at 40 l/min plastic sensor (DRS-350)
Max. operating pressure:	200 bar (DRS-150; DRS-250) 16 bar (DRS-350)
Temperature:	-20 ... +80 °C (medium) -20 ... +100 °C (bearing) -20 ... +150 °C (medium with DRS-...S)
Measuring accuracy:	±1,5% of full scale ±5% of full scale (DRS-...K0000)
Linearity:	±0,5% of full scale
Repeatability:	±0,1% of full scale
Electrical connection:	plug connector M12x1 1,5 m cable (DRS-0 only) 2 m cable (DRS-...F5 only) 1,5 m silicone cable (DRS-...S)
Protection:	IP 65 (plug connector), IP 66 (cable)
<b>Weight (sensor and electronics)</b>	
Sensor:	approx. 80 g (DRS-...350) approx. 550 g (DRS-...150; DRS-...250)
Electronics:	approx. 60 g (DRS-...K...; DRS-...F...; DRS-...L3...) approx. 100 g (DRS-...L442) approx. 450 g (DRS-...Z...) approx. 650 g (DRS-...C...)

## Electrical Data

### DRS-0...K0000, DRS-...S000

Supply:	6...28 V <sub>DC</sub>
Output pulse:	rectangular pulse signal, open collector NPN, max. 10 mA

### DRS-...F300; DRS-...F500

Supply:	12-28 V <sub>DC</sub>
Power consumption:	10 mA
Pulse output:	PNP, open collector, max. 20 mA
Option:	Pt 100, 3-wire

### DRS-...F390

Supply:	24 V <sub>DC</sub> ± 20 %
Power consumption:	15 mA
Pulse output:	PNP, open collector, max. 20 mA
Factor:	1...1/128 set at the factory
Option:	Pt 100, 2-wire
Response time:	t <sub>90</sub> = 25 s (DRS-91.../-92...) t <sub>90</sub> = 100 s (DRS-93...)

### DRS-...L...

Supply:	24 V <sub>DC</sub> ± 20 %
Output:	0(4)-20 mA, 3-wire or 2-wire
Max. load:	500 Ω
Option:	Pt 100 (2-wire)
Response time:	t <sub>90</sub> = 25 s (DRS-91.../-92...) t <sub>90</sub> = 100 s (DRS-93...)

### DRS-...C30...

Compact electronics	
Display:	3-digit LED
Switching outputs:	2 semiconductor PNP or NPN, set at the factory
Contact operation:	N/C / N/O contact frequency programmable
Setting:	with 2 buttons
Supply:	24 V <sub>DC</sub> ±20%, 3-wire
Electrical connection:	plug connector M12x1


### DRS-...C34...

Compact electronics	
Display:	3-digit LED
Analogue output:	(0)4...20 mA adjustable
Switching outputs:	1 semiconductor PNP or NPN, set at the factory
Contact operation:	N/C / N/O contact / frequency programmable
Setting:	with 2 buttons
Supply:	24 V <sub>DC</sub> ±20%, 3-wire
Power consumption:	approx. 100 mA
Electrical connection:	plug connector M12x1

**Materials**

Housing:	PPO, brass or stainless steel 1.4301
Turbine:	PEI
Magnets:	ceramic
Axle:	hard metal
Bearing:	sapphire
Seal:	NBR (others on request) FKM (DRS-0...S000)


**Pressure loss**

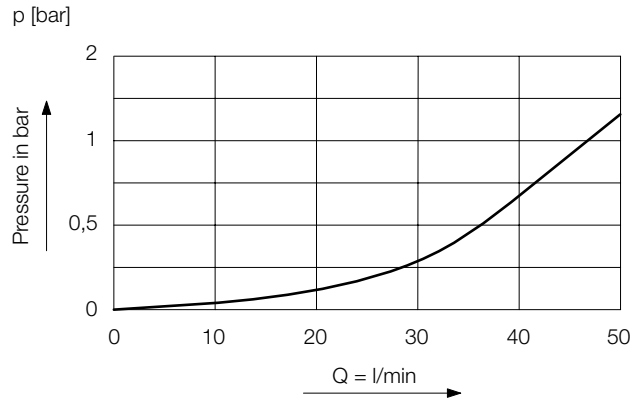

**Electrical Connection**

DRS-...F., DRS-...L3... (3-wire without Pt 100)


**Plug**



**Cable**


brown: +Vs  
blue: GND  
black: Signal

**Frequency diagram (DRS-\*150, DRS-\*250)**

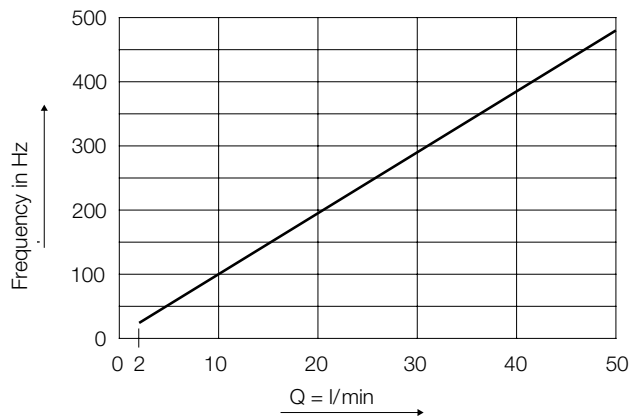

DRS-...F., DRS-...L3... (3-wire with Pt 100)


**Plug**




**Cable**

brown: +Vs  
blue: GND  
black: signal  
white: Pt 100 2-wire  
grey: Pt 100 2-wire


**DRS-...L442...**



DRS-...L342 (2-wire)

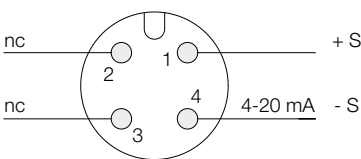

DRS-...C3...

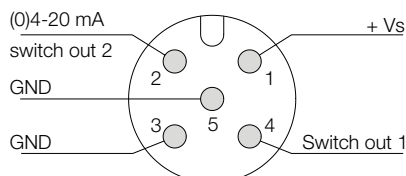



**Order Details** (example: DRS-9350 I4 L303 0)

Material sensor housing	Model	Connection	Evaluating electronics	Option
Brass	DRS-9150	<b>I4</b> = G 1/2 female thread <b>G4</b> = G 1/2 female/male thread <b>N5</b> = 3/4" NPT male thread <b>G5</b> = G 3/4 male thread	<b>Frequency output</b> <b>F300</b> = plug connector M12x1, PNP <b>F320</b> = plug connector M12x1, PNP, divider 1:2 <b>F340</b> = plug connector M12x1, PNP, divider 1:4 <b>F390</b> = plug connector M12x1, PNP, divider 1...1/128 adjusted <b>F500</b> = 2 m PVC cable, PNP <b>Analogue output</b> <b>L303</b> = plug connector M12x1, 0-20 mA, 3-wire <b>L342</b> = plug connector M12x1, 4-20 mA, 2-wire <b>L343</b> = plug connector M12x1, 4-20 mA, 3-wire <b>L442</b> = plug connector DIN 43 650, 4-20 mA, 2-wire <b>Compact electronics<sup>1)</sup></b> <b>C30M</b> = LED display, 2 x NPN switching output, plug connector M12x1 <b>C30R</b> = LED display, 2 x PNP switching output, plug connector M12x1 <b>C34N</b> = LED display, 4-20 mA, 1 NPN switching output, plug connector M12x1 <b>C34P</b> = LED display, 4-20 mA, 1 PNP switching output, plug connector M12x1	<b>0</b> = without <b>P</b> = Pt 100 <sup>2)</sup> <b>Y</b> = special model
Stainless steel	DRS-9250			
Plastic (PPO)	DRS-9350			

<sup>1)</sup> Please specify flow direction in writing.

<sup>2)</sup> For option F3/F5 and L3x3 only, brass or stainless steel version

**Plug-on Display**

for model DRS-...L442 (with 4-20 mA output and DIN plug connector)

Description	Order number
4-digit LED, connector DIN 43650, 2-wire, supply through analogue output	AUF-1000
as above however with additional open collector output	AUF-1001



**Order Details OEM Version** (example: DRS-0350 I4 K0000)

Material sensor housing	Model	Connection	Evaluating electronics
Brass	DRS-0150	<b>I4</b> = G 1/2 female thread <b>G4</b> = G 1/2 female/male thread <b>N5</b> = 3/4" NPT male thread <b>G5</b> = G 3/4 male thread	<b>Frequency output</b> <b>K0000</b> = 1.5 m PVC cable, NPN, OEM without CE <b>S0000</b> = 1.5 m silicone cable, NPN, OEM without CE, max. 150 °C (not for DRS-0350) <b>S000P</b> = 1.5 m silicone cable, NPN, OEM without CE, Pt 100, max. 150 °C (not for DRS-0350)
Stainless steel	DRS-0250		
Plastic (PPO)	DRS-0350		



Turbine Wheel Flowmeter/Monitor Model DRS

Dimensions [mm]

